

BRICK



The base of any Lighting Design

24 x OSRAM OSTAR STAGE N
RGBW LEDs

HIGH-QUALITY COLOR MIXING
QUICKLY INTERCHANGEABLE
BEAM ANGLES

IP65 RATED

DESIGNED FOR BOTH
TEMPORARY AND PERMANENT
INSTALLATIONS

BUILT-IN FULL-RANGE PSU

VERY COMPACT AND
LIGHTWEIGHT

THE BEST VALUE FOR MONEY
The new BRICK is a highly
compact, self-contained, IP65 LED
Wash light.

BRICK is suitable for various
purposes, offering a range of
projection angles quickly
interchangeable (no tools required).
BRICK comes with an IP65 power
cable plus 2 DMX cables with M / F
XLR connectors (all IP65), that make it
perfect for temporary lighting
applications, but also for safe long-
lasting installations.

Built with top quality components,
BRICK gives you the best value for
money by efficient design and full
production automation.



BRICK



LED TECHNOLOGY |

24 x Osram Ostar Stage N Full Color (RGBW) LEDs

OPTICAL GROUP |

8° projection angle
Range of quick-mounting holographic filters included: 20° / 40° / 60x10° (no mounting tools required)
Uniform projection on surfaces

COLOR GENERATION |

16 million colors
Wide palette of pure uniform whites with variable linear color temperature (2700 K – 8000 K)

INTERFACE / CONTROL /

PROGRAMMING |

4-digit 7-segment LED display
+ 4 soft keys: control/management/monitoring of the main parameters
Controlled via DMX 512 and RDM standard digital communication protocols
Internal operating system updatable via DTS RED BOX interface

DMX |

10 DMX channels

POWER SUPPLY |

Built-in full-range PSU
100-240 Vac 50/60 Hz
Power consumption: 400 VA max

CONNECTIONS |

Stripped power cable; 2 x DMX cables with Neutrik XLR 5-pole In / Out IP65 connectors.
Included: PowerCON TRUE1 Male / Female cable connectors

Available: permanent installation kit (IP67); power connector + 2 x DMX In / Out connectors

OPERATING AMBIENT

TEMPERATURE |


-10° / 40°

PHYSICAL |

Weight / Dimensions: 10 Kg
WxHxD 438 x 255 x 160 mm

INTERNATIONAL CERTIFICATIONS |

CE Certification

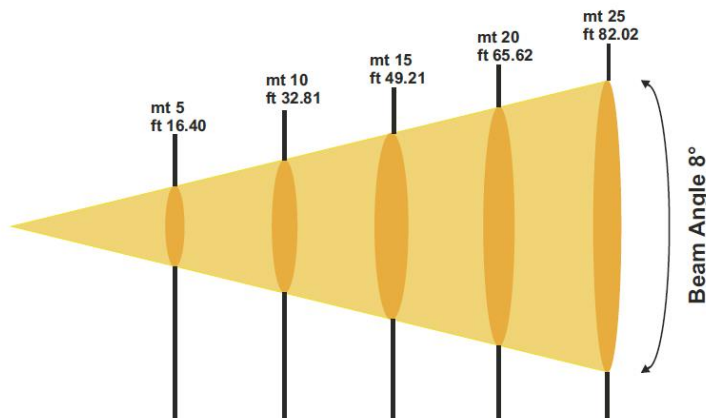

RED	Lux center [lx]	4066	1017	452	254	163
	Foot candles [fc]	378	94	42	24	15
GREEN	Lux center [lx]	6647	1662	739	415	266
	Foot candles [fc]	618	154	69	39	25
BLUE	Lux center [lx]	545	136	61	34	22
	Foot candles [fc]	51	13	6	3	2
WHITE	Lux center [lx]	9940	2485	1104	621	398
	Foot candles [fc]	924	231	103	58	37
FULL RGBW	Lux center [lx]	14277	3569	1586	892	571
	Foot candles [fc]	1327	332	147	83	53
BEAM ANGLE	Diameter [cm]	70	140	210	280	350
	Diameter [ft]	2,29	4,59	6,88	9,18	11,47