

# FOCUS



## 16-million Colors in an extra compact IP65 projector

- 3 x OSTAR RGBW HIGH-POWER LED
- HIGH QUALITY RGBW COLOR MIXING
- IP65 WATER PROOF
- COMPACT AND VERSATILE
- PRODUCT CUSTOMIZABLE FOR VARIOUS APPLICATIONS
- CHOICE OF DIFFERENT LENSES AVAILABLE
- DMX-CONTROLLED



FOCUS is a very compact IP65 LED projector available either with a recessed flange (FOCUS R) or with an orientable bracket (FOCUS).

The unit is fitted with 3 high power Full Color (RGBW) LEDs.

The unit is suitable for shopping centers, restaurants, museums, clubs and any application where high quality color mixing and great compactness are required.

FOCUS can be powered by DRIVENET Series external power supplies / controllers



## OUTPUT

3 x Full Colour RGBW LEDs  
 Lumens: 920@500mA  
 LED Channels: Red/Green/Blue/White  
 LED lifespan: 50,000 hours (70% lumen output)

## OPTICAL GROUP

2 lenses sets available:  
 22.9° / 28°

## INTERFACE / CONTROL / PROGRAMMING

DMX 512, RDM and ArtNet (via Drivenet series)

## POWER SUPPLY

Power consumption: 21 W max  
 PSU Full range 100-240Vac 50/60Hz:  
 - Drivenet 832 (4 items per output, total 32)  
 - Drivenet 416 (4 items per output, total 16)  
 - Drivenet 1664 (4 items per output, total 64)

## CONNECTIONS


End-stripped 8-pole cable (1 m)

## OPERATING AMBIENT TEMPERATURE

-10° / 40°

## PHYSICAL

IP65  
 Housing:  
 FOCUS FC: Aluminium  
 FOCUS R FC: Aluminium / Stainless steel  
 Front screen: 3 mm Tempered glass  
 Weight:  
 FOCUS FC: 0.8 Kg  
 FOCUS R FC: 1 Kg  
 Dimensions:  
 FOCUS FC: W 96 mm / H 105 mm / D 89.5 mm  
 FOCUS R FC: W 125mm / H 125 mm / D 78 mm

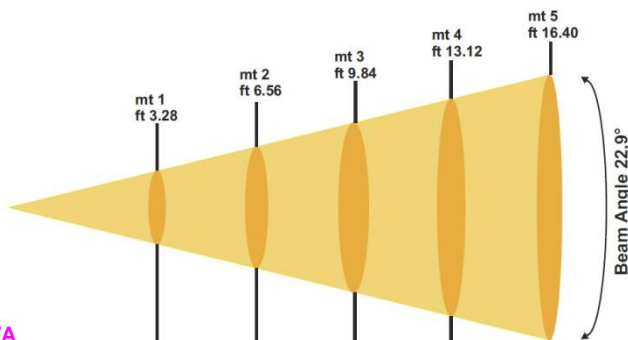

## PHOTOMETRIC DATA MEDIUM LENSES

Lux center [lx]	3752	938	417	235	150
Foot candles [fc]	349	87	39	22	14
Diameter [cm]	41	81	122	162	203
Diameter [ft]	1,33	2,66	3,99	5,32	6,65

Beam Angle 22,9°